

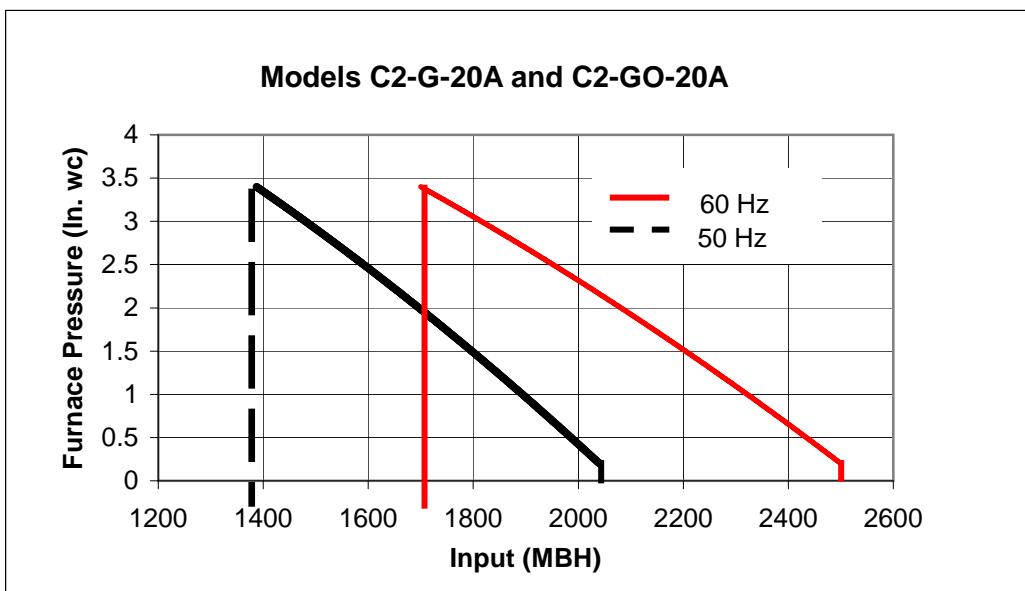
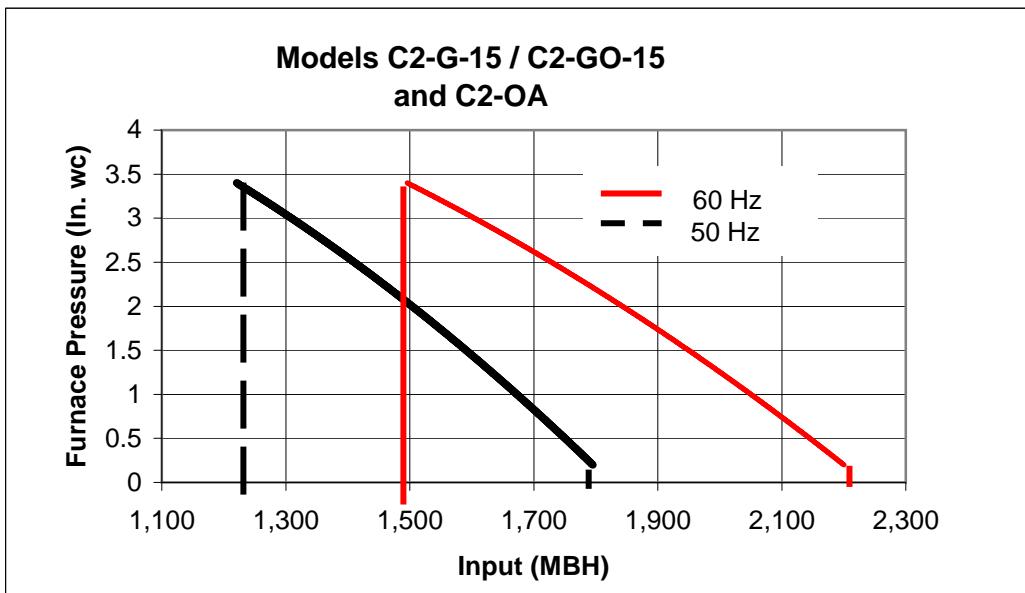




The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

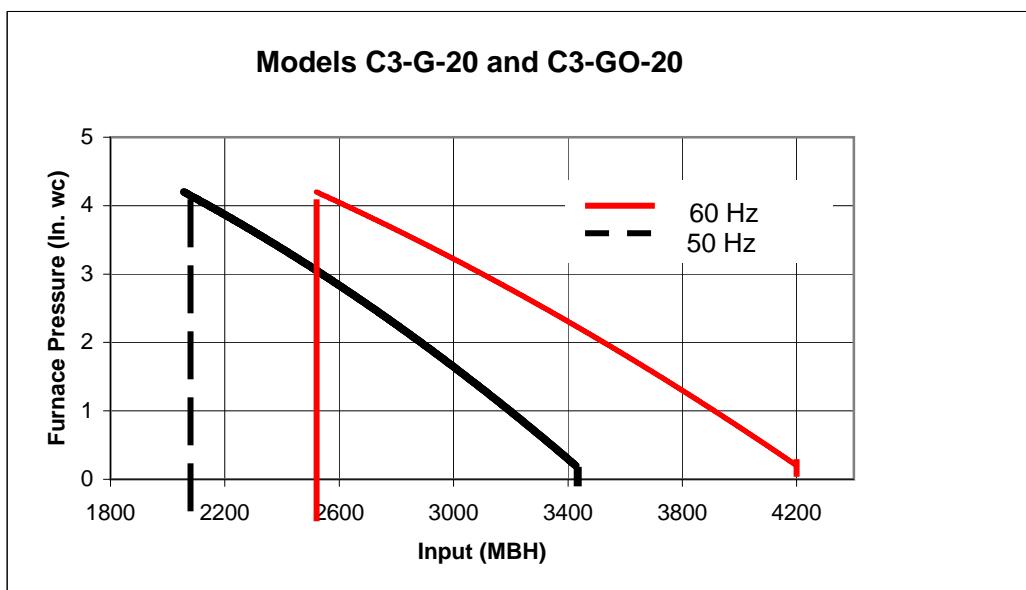



The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

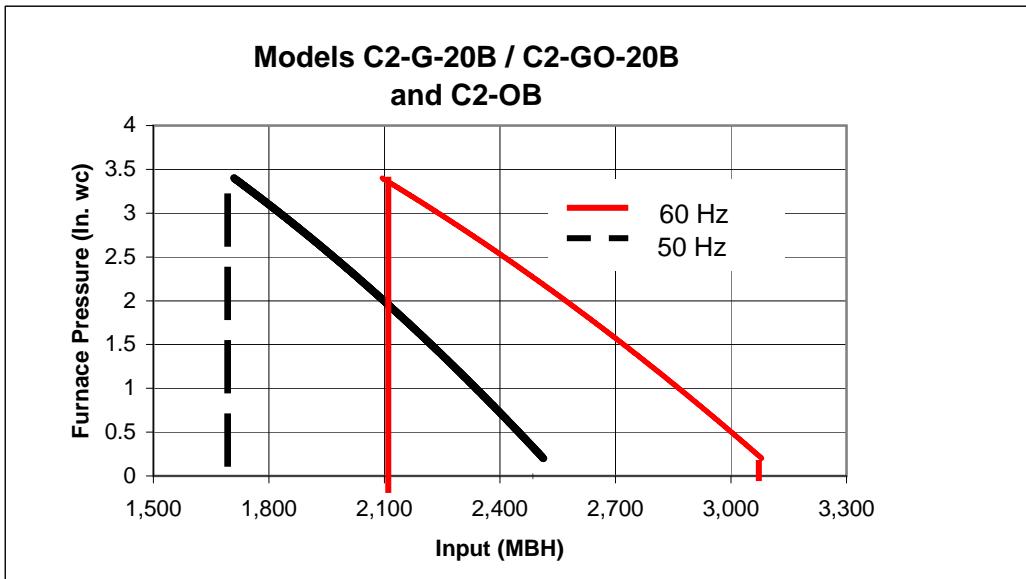

The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

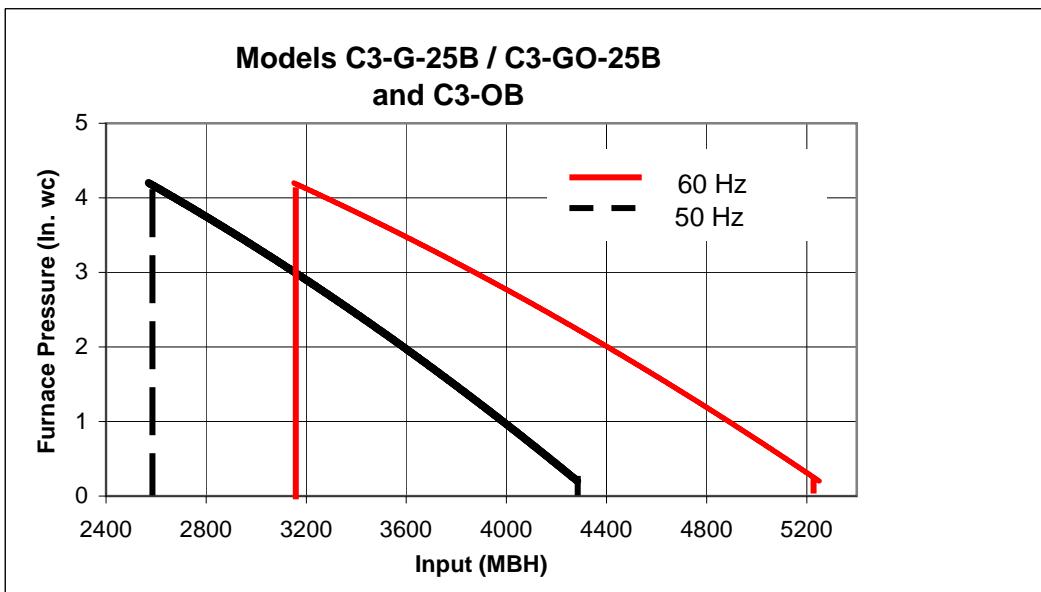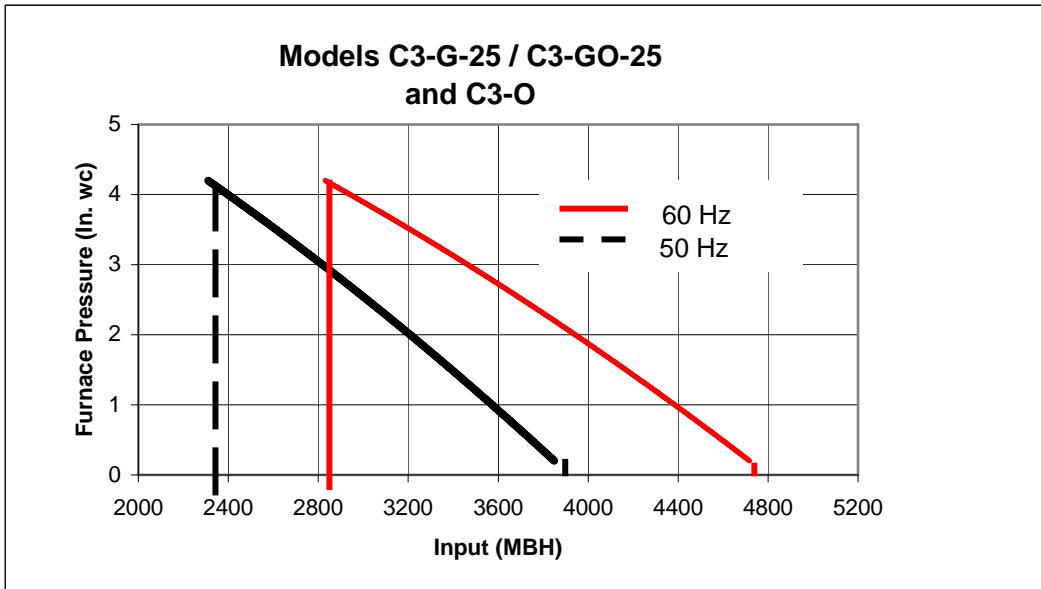


The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

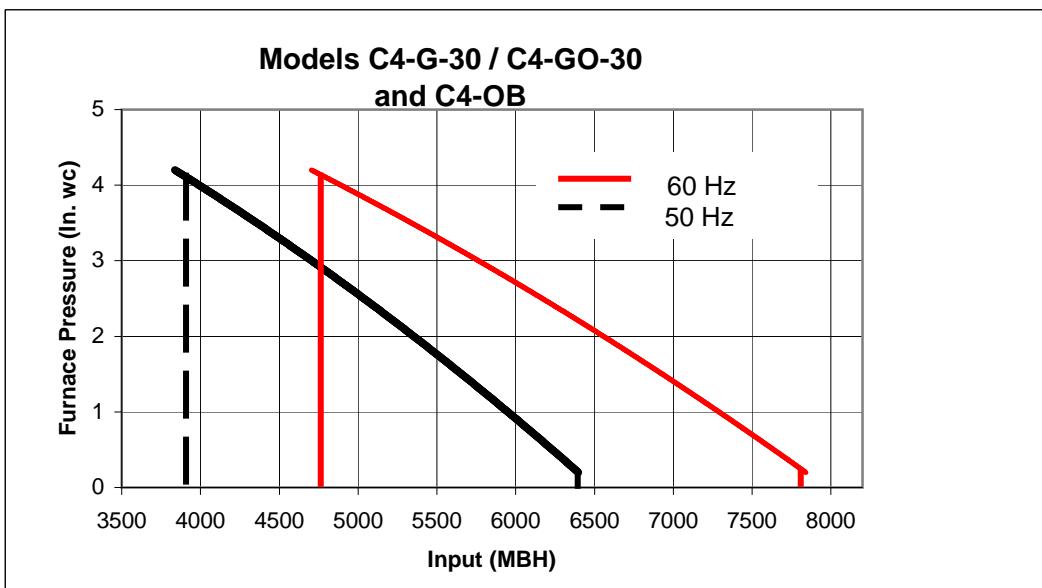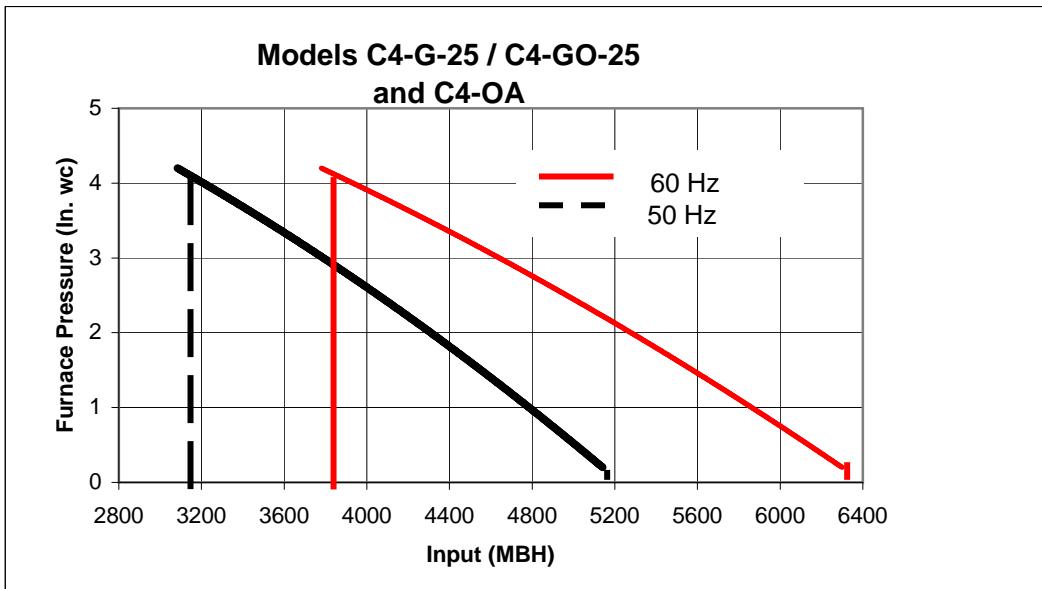


The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.



**Models C5-G-30 / C5-GO-30
and C5-O**

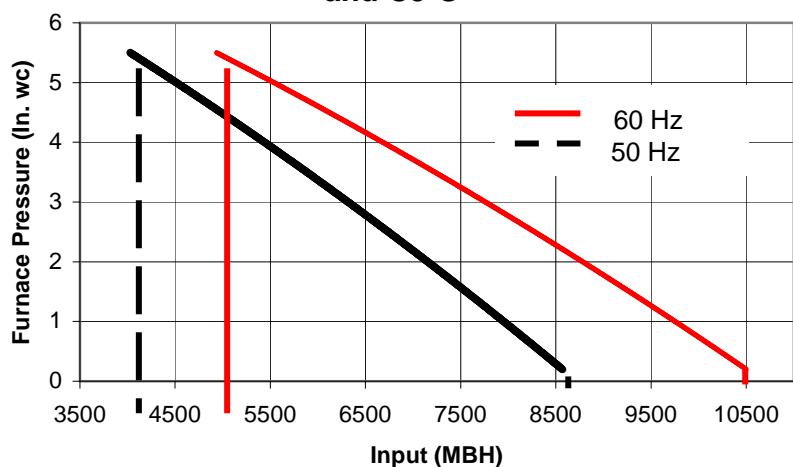


**Models C5-G-30B / C5-GO-30B
and C5-OB**

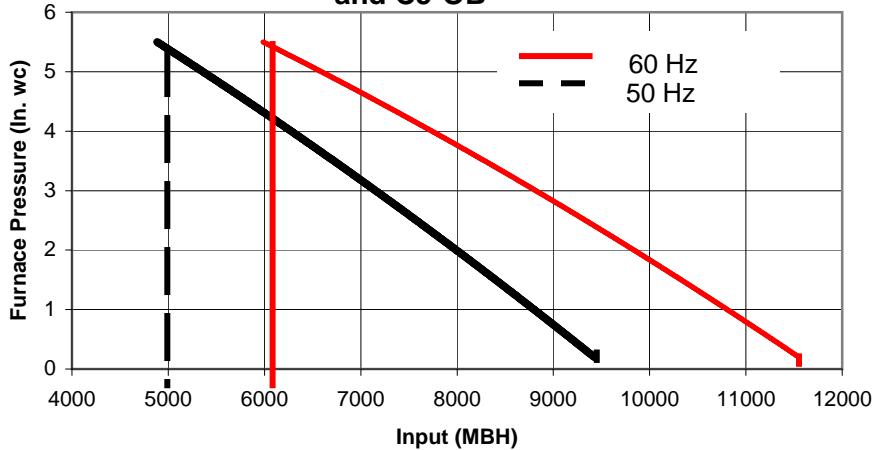

The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

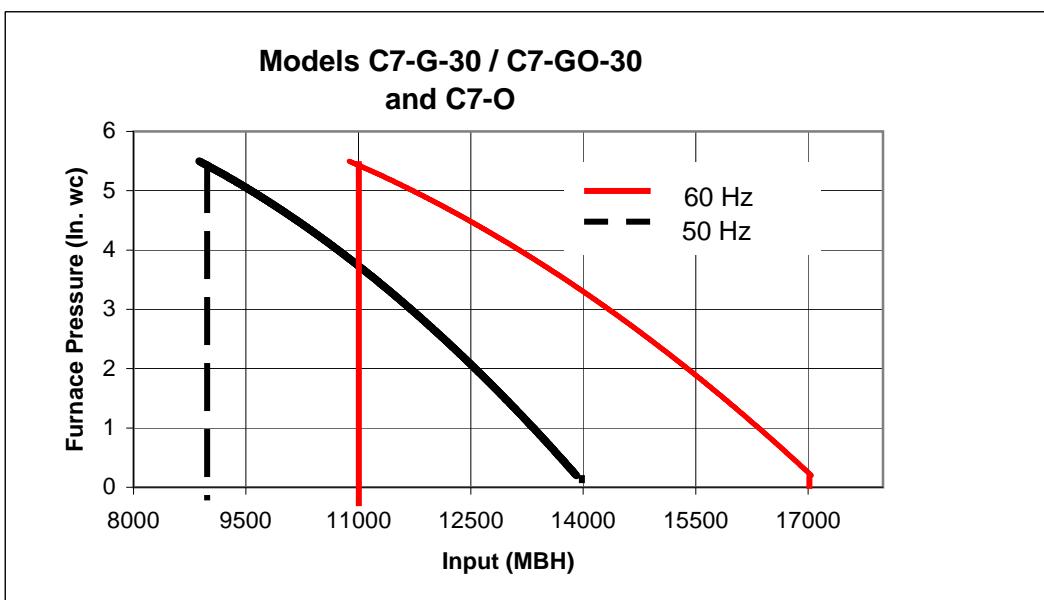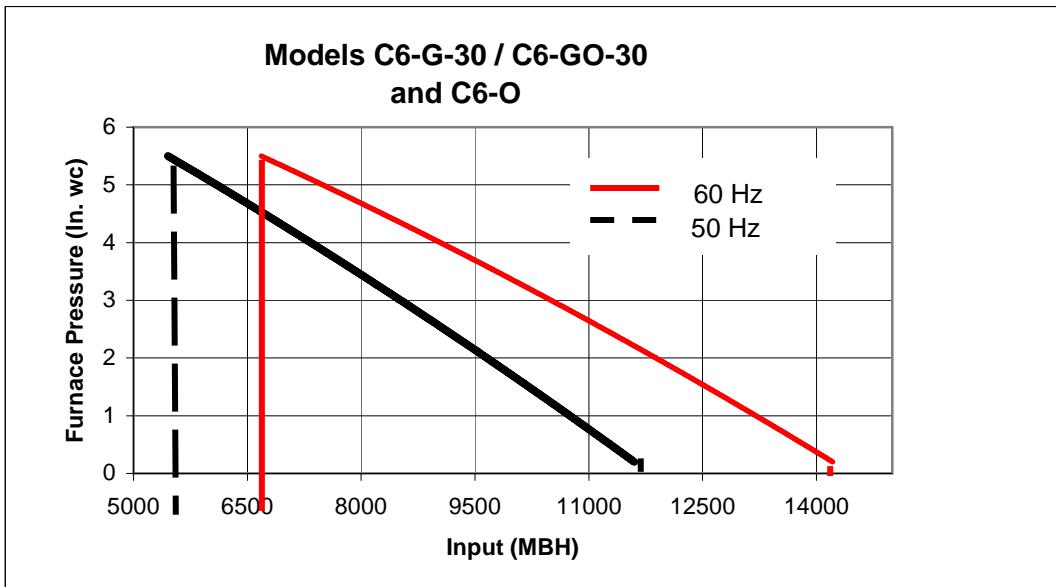

The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.

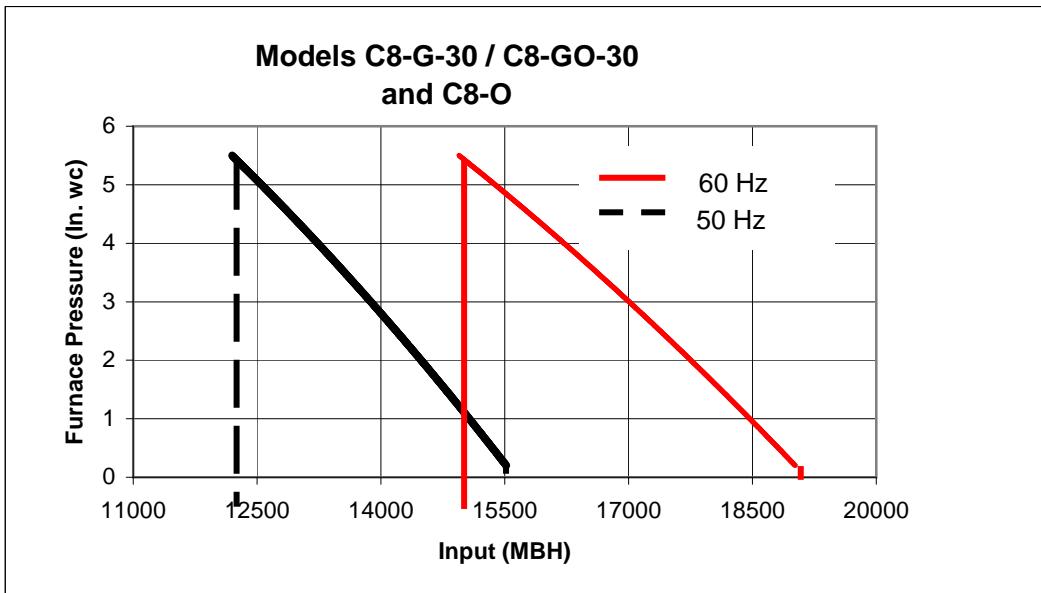

The Capacity Charts are based upon 2,000 foot elevation, 80 degree F combustion air temperature, firing with 15% excess air (3% O₂) and standard diffuser blade settings. If job conditions vary from above conditions, capacity rates may vary.